



Totally enclosed fan-cooled (IE3)(*1)

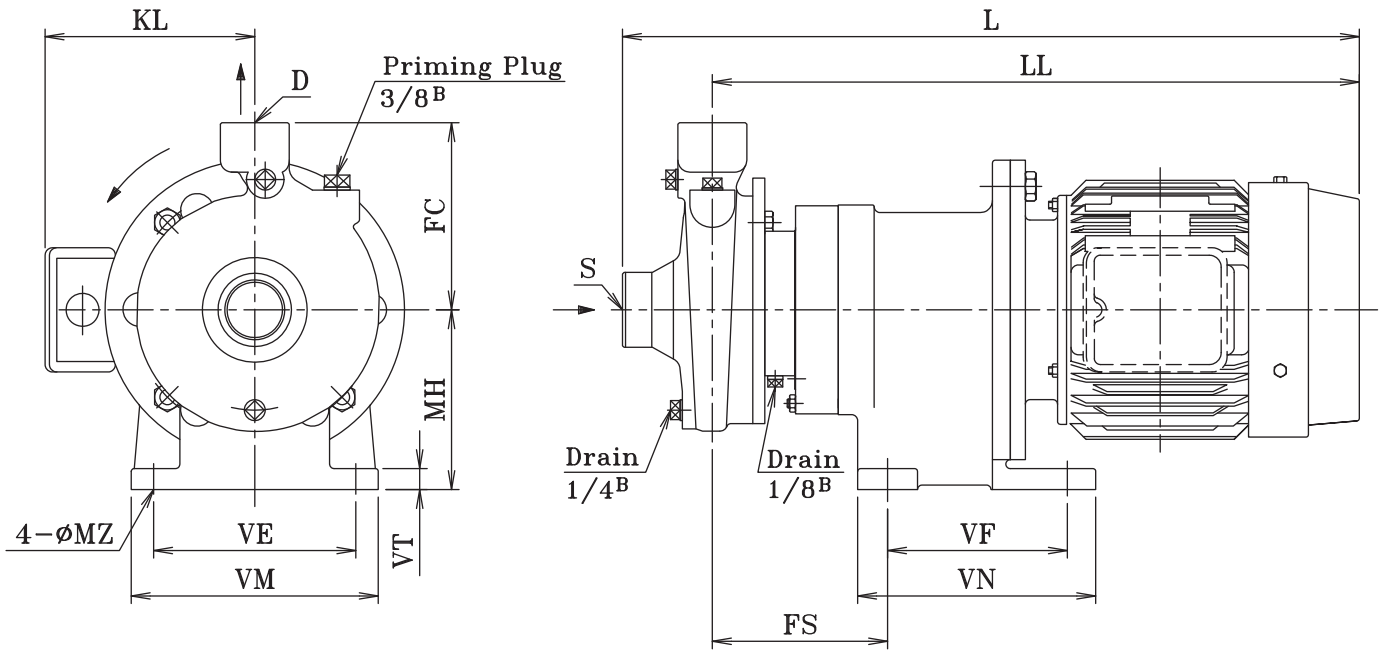

Increased safety motor (*2)

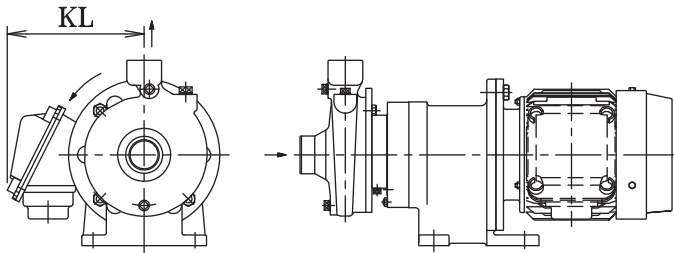

Dimension and Weights

(Unit:mm,kg)

	Model	kW	S	D	LL	FC	MH	FS	L	VE	VF	VM	VN	MZ	VT	KL	Weight
TEFCM(*1)	25CLMS07Z	0.75	Rc1	Rc1	436.5	125	120	119	496.5	135	120	165	159	12	14	145	27
	25CLMS15Z	1.5	Rc1	Rc1	474	125	120	119	534	135	120	165	159	12	14	156	31.5
	40CLMS07Z	0.75	Rc1 1/2	Rc1 1/4	436.5	125	120	119	496.5	135	120	165	159	12	14	145	26.5
	40CLMS15Z	1.5	Rc1 1/2	Rc1 1/4	474	125	120	119	534	135	120	165	159	12	14	156	31
	40CLMS22Z	2.2	Rc1 1/2	Rc1 1/4	503	125	120	119	563	135	120	165	159	12	14	156	35.5
ISM(*2)	25CLMS07A	0.75	Rc1	Rc1	434	125	120	119	494	135	120	165	159	12	14	181	29.5
	25CLMS15A	1.5	Rc1	Rc1	478	125	120	119	538	135	120	165	159	12	14	195	38
	40CLMS07A	0.75	Rc1 1/2	Rc1 1/4	434	125	120	119	494	135	120	165	159	12	14	181	29
	40CLMS15A	1.5	Rc1 1/2	Rc1 1/4	478	125	120	119	538	135	120	165	159	12	14	195	37.5

-Remarks-