


Totally enclosed fan-cooled (IE3)(*1))

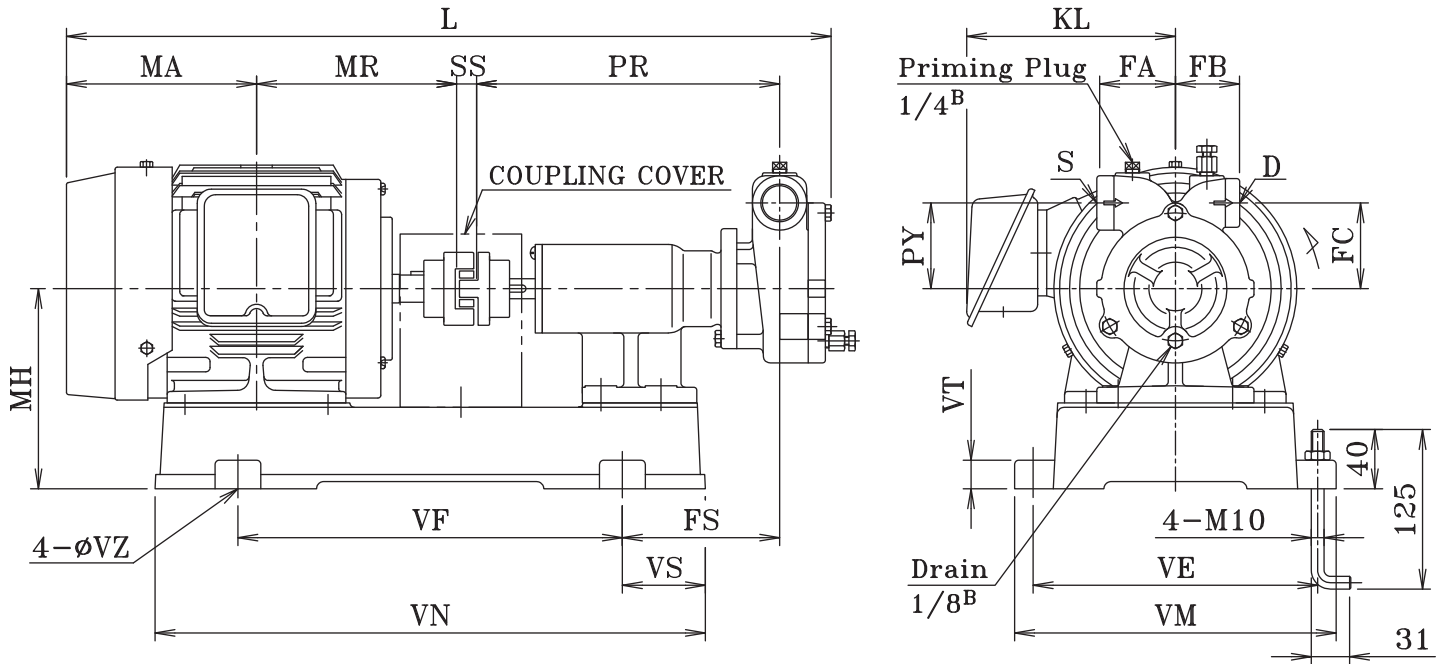

Dimension and Weights

(Unit:mm,kg)

Model	kW	S	D	PR	PY	FA	FB	FS	FC	MH	L	MA	MR	SS	VE	VF	VM	VN	VS	VT	VZ	KL	Weight
20FH1- ^{5-V} / _{6-V}	0.4	Rc3/4	Rc1/2	212	60	55	45	108	60	130	503	121	120	14	184	245	210	357	56	20	12	-	20
	0.75	Rc3/4	Rc1/2	212	60	55	45	110	60	140	524	122	140	14	199	269	225	385	58	20	12	146	27
20FH2- ^{5-V} / _{6-V}	0.4	Rc3/4	Rc1/2	220	85	65	50	116	85	130	520.5	121	120	14	184	245	210	375	56	20	12	-	22
	0.75	Rc3/4	Rc1/2	220	85	65	50	118	85	140	541.5	122	140	14	199	269	225	385	58	20	12	146	29
	1.5	Rc3/4	Rc1/2	220	85	65	50	125	85	150	606.5	154.5	168.5	18	214	300	240	430	65	20	12	156	38
25FH ^{5-V} / _{6-V}	1.5	Rc1	Rc3/4	220	85	65	50	125	85	150	606.5	154.5	168.5	18	214	300	240	430	65	20	12	156	38
	2.2	Rc1	Rc3/4	220	85	65	50	125	85	150	606.5	154.5	168.5	18	214	300	240	430	65	20	12	156	40
32FH ^{5-V} / _{6-V}	1.5	Rc1 ^{1/4}	Rc1	235	95	80	60	120	95	145	628	154.5	168.5	18	230	350	260	500	75	15	12	156	44
	2.2	Rc1 ^{1/4}	Rc1	235	95	80	60	120	95	145	628	154.5	168.5	18	230	350	260	500	75	15	12	156	48.5
	3.7	Rc1 ^{1/4}	Rc1	235	95	80	60	79	95	180	691	186	200	18	280	425	310	616	96	25	12	175	65
40FH ^{5-V} / _{6-V}	3.7	Rc1 ^{1/2}	Rc1 ^{1/4}	235	105	80	60	79	105	180	688	186	200	18	280	425	310	616	96	25	12	175	66

-Remarks-

- Dimensions and weights shown in above table reflected to Totally Enclosed Fan Cooled type motor. Values will be slightly different when other type of motor is being used.
- Suction and discharge flanges are in accordance with JIS 20K FF standard.
- *1 Motor for 0.75 kW or greater sizes is complied with IE3 standard.