

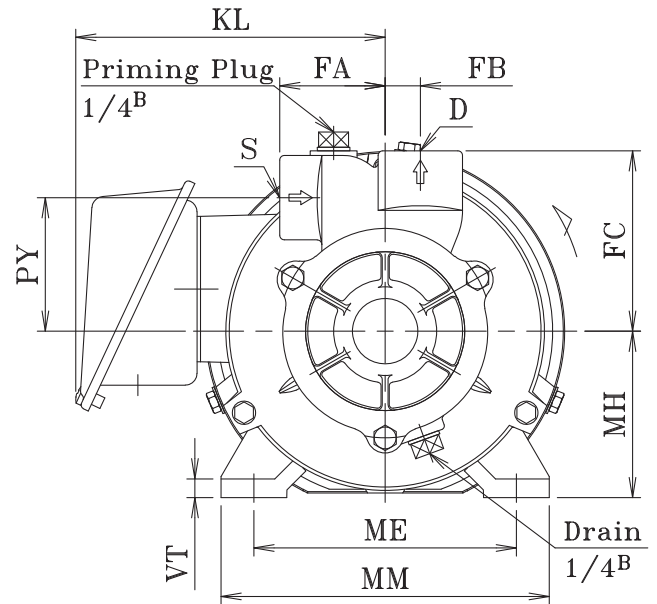



Totally enclosed fan-cooled (IE3)(*1)

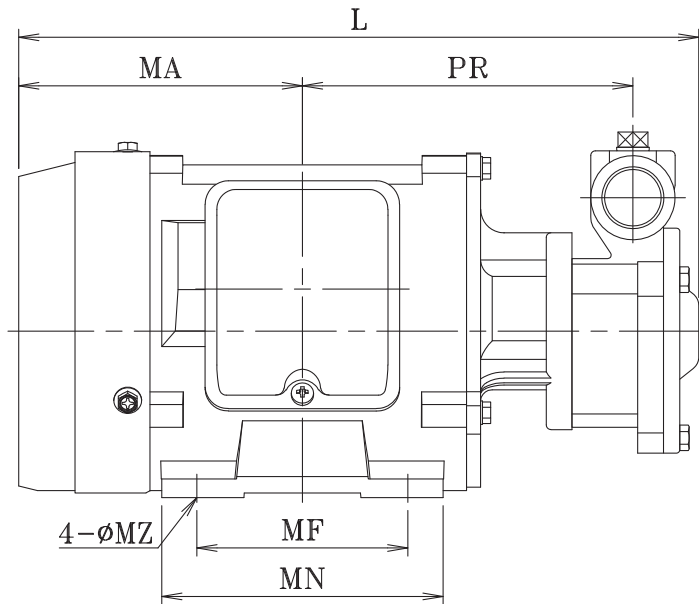

Single phase, open drip proof(*2)

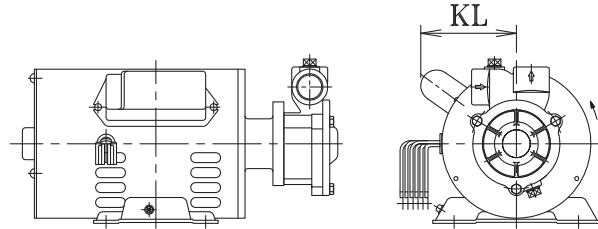

Increased safety explosion proof(*3)

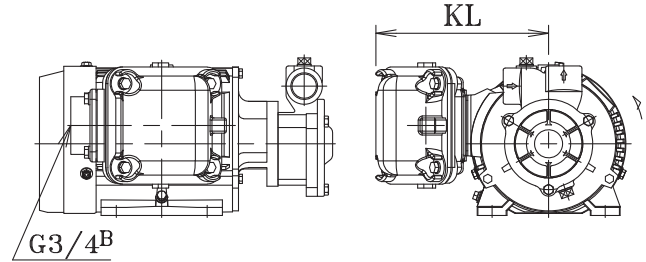

Dimension and Weights (*4)

(Unit:mm,kg)

	Model	kW	S·D	PR	PY	FA	FB	FC	MH	L	MA	ME	MF	MM	MN	MZ	VT	KL	Weight
TEFCM(*1)	15KLD02Z	0.31	Rc1/2	141	50	40	13	70	71	290	121	112	90	140	120	8×10	8	132	9.5
	20KLD04Z	0.56	Rc3/4	141	57	45	15	77	71	290	121	112	90	140	120	8×10	8	132	11
	25KLD07Z	0.975	Rc1	132.5	68	54	19	92	80	304.5	140	125	100	155	125	10×12	8	147	21
	25KLD15Z	1.95	Rc1	155.5	68	54	19	92	90	342	154.5	140	125	176	149	10×12	10	156	25
	32KLD07Z	0.975	Rc1 1/4	131.5	78	58	24	106	80	304.5	140	125	100	155	125	10×12	8	147	22
	32KLD15Z	1.95	Rc1 1/4	154.5	78	58	24	106	90	342	154.5	140	125	176	149	10×12	10	156	26
	40KLD15Z	1.95	Rc1 1/2	153.5	83	66	27	114	90	342	154.5	140	125	176	149	10×12	10	156	26
SPIM(*2)	15KLD01S	0.15	Rc1/2	141	48	38	13	65	71	266.5	98	112	90	150	110	7×20	3.2	86	8
	15KLD02S	0.3	Rc1/2	141	50	40	13	70	71	267	98	112	90	150	110	7×20	3.2	86	12
	20KLD04S	0.56	Rc3/4	154.5	57	45	15	77	80	297.5	115	125	100	167	125	10×17	3.2	91	14
ISM(*3)	15KLD02A	0.31	Rc1/2	141	50	40	13	70	71	290	121	112	90	140	120	7	8	171	18
	20KLD04A	0.56	Rc3/4	141	57	45	15	77	71	290	121	112	90	140	120	7	8	171	19
	25KLD07A	0.975	Rc1	132.5	68	54	19	92	80	304.5	140	125	100	155	125	10	8	181	23
	25KLD15A	1.95	Rc1	155.5	68	54	19	92	90	371	183.5	140	125	172	149	10	10	195	35.5
	32KLD07A	0.975	Rc1 1/4	131.5	78	58	24	106	80	304.5	140	125	100	155	125	10	8	181	24
	32KLD15A	1.95	Rc1 1/4	154.5	78	58	24	106	90	371	183.5	140	125	172	149	10	10	195	36.5
	40KLD15A	1.95	Rc1 1/2	153.5	83	66	27	114	90	371	183.5	140	125	172	149	10	10	195	36.5

-Remarks-

Material of the terminal box for Totally Enclosed Fan Cooled motor (0.31 to 0.56kW) is plastic.

*1 Motor for 0.75kW or greater sizes is complied with IE3 standard.

*2 Two capacitors are implemented onto 0.56 kW motor. One for starting and another one for running purpose.

*4 Actual output power value for Extra-loaded corresponded motor.