

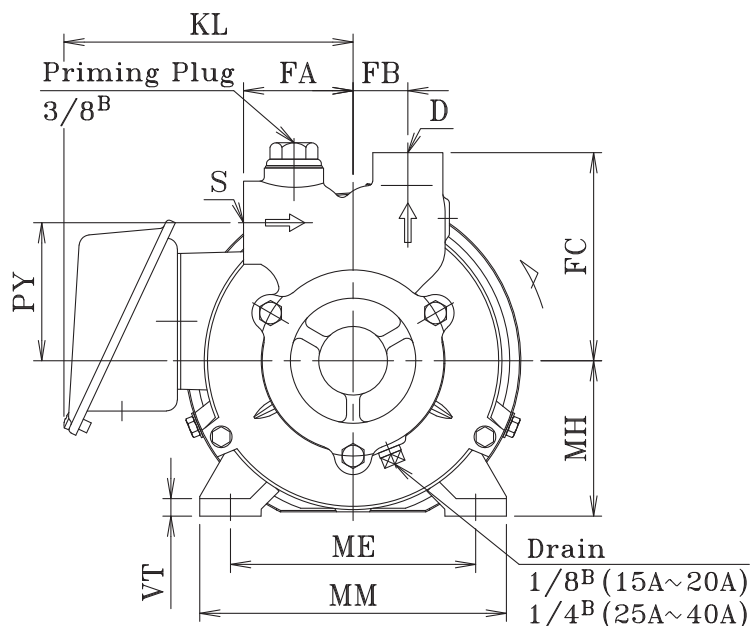



Totally enclosed fan-cooled (IE3)(*1)

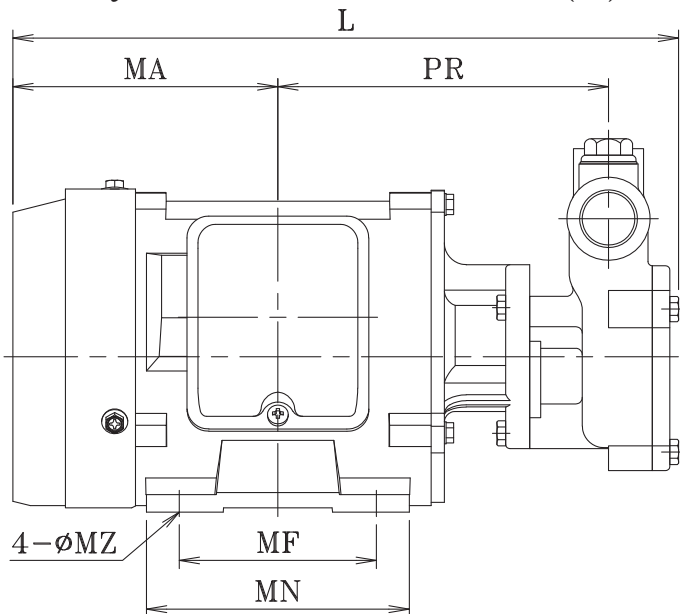

Single phase, open drip proof(*2)

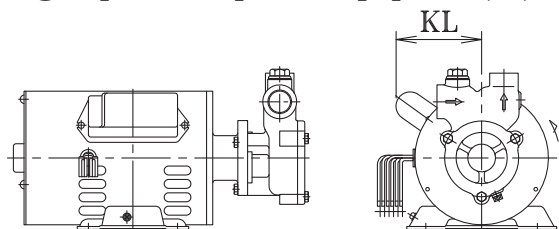

Increased safety explosion proof(*3)

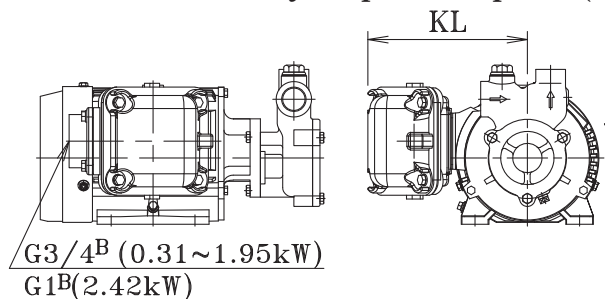

Dimension and Weights

(*4)

(Unit:mm,kg)

	Model	kW	S	D	PR	PY	FA	FB	FC	MH	L	MA	ME	MF	MM	MN	MZ	VT	KL	Weight
TEFCM(*1)	15NPD02Z	0.31	Rc1/2	Rc3/8	152	52	45	21	81	71	304	121	112	90	140	120	8×10	8	132	9.5
	20NPD04Z	0.56	Rc3/4	Rc1/2	151	63	50	25	95	71	304	121	112	90	140	120	8×10	8	132	12
	20NPD07Z	0.975	Rc3/4	Rc1/2	144.5	63	50	25	95	80	316.5	140	125	100	155	125	10×12	8	147	18
	25NPD07Z	0.975	Rc1	Rc3/4	144.5	70	60	28	105	80	323	140	125	100	155	125	10×12	8	147	22
	25NPD15Z	1.95	Rc1	Rc3/4	167.5	70	60	28	105	90	360.5	154.5	140	125	176	149	10×12	10	156	26
	32NPD15Z	1.95	Rc1 1/4	Rc1	167.5	80	65	35	120	90	366	154.5	140	125	176	149	10×12	10	156	27
	40NPD22Z	2.42	Rc1 1/2	Rc1 1/4	171.5	85	70	40	130	90	405	183.5	140	125	176	149	10×12	10	156	32
SPIM(*2)	15NPD02S	0.3	Rc1/2	Rc3/8	152	52	45	21	81	71	281	98	112	90	150	110	7×20	3.2	86	12
	20NPD04S	0.56	Rc3/4	Rc1/2	164.5	63	50	25	95	80	311.5	115	125	100	167	125	10×17	3.2	91	14
ISM(*3)	15NPD02A	0.31	Rc1/2	Rc3/8	152	52	45	21	81	71	304	121	112	90	140	120	7	8	171	18
	20NPD04A	0.56	Rc3/4	Rc1/2	151	63	50	25	95	71	304	121	112	90	140	120	7	8	171	20
	25NPD07A	0.975	Rc1	Rc3/4	144.5	70	60	28	105	80	323	140	125	100	155	125	10	8	181	24
	25NPD15A	1.95	Rc1	Rc3/4	167.5	70	60	28	105	90	389.5	183.5	140	125	172	150	10	10	195	36.5
	32NPD15A	1.95	Rc1 1/4	Rc1	167.5	80	65	35	120	90	395	183.5	140	125	172	150	10	10	195	37.5
	40NPD22A	2.42	Rc1 1/2	Rc1 1/4	186	85	70	40	130	100	414	178	160	140	196	168	12	12	195	44.5

Remarks-

Material of the terminal box for Totally Enclosed Fan Cooled motor (0.31 to 0.56kW) is plastic.

*1 Motor for 0.75kW or greater sizes is complied with IE3 standard.

*2 Two capacitors are implemented onto 0.56 kW motor. One for starting and another one for running purpose.

*4 Actual output power value for Extra-loaded corresponded motor.