


Totally enclosed fan-cooled (IE3)(*1)

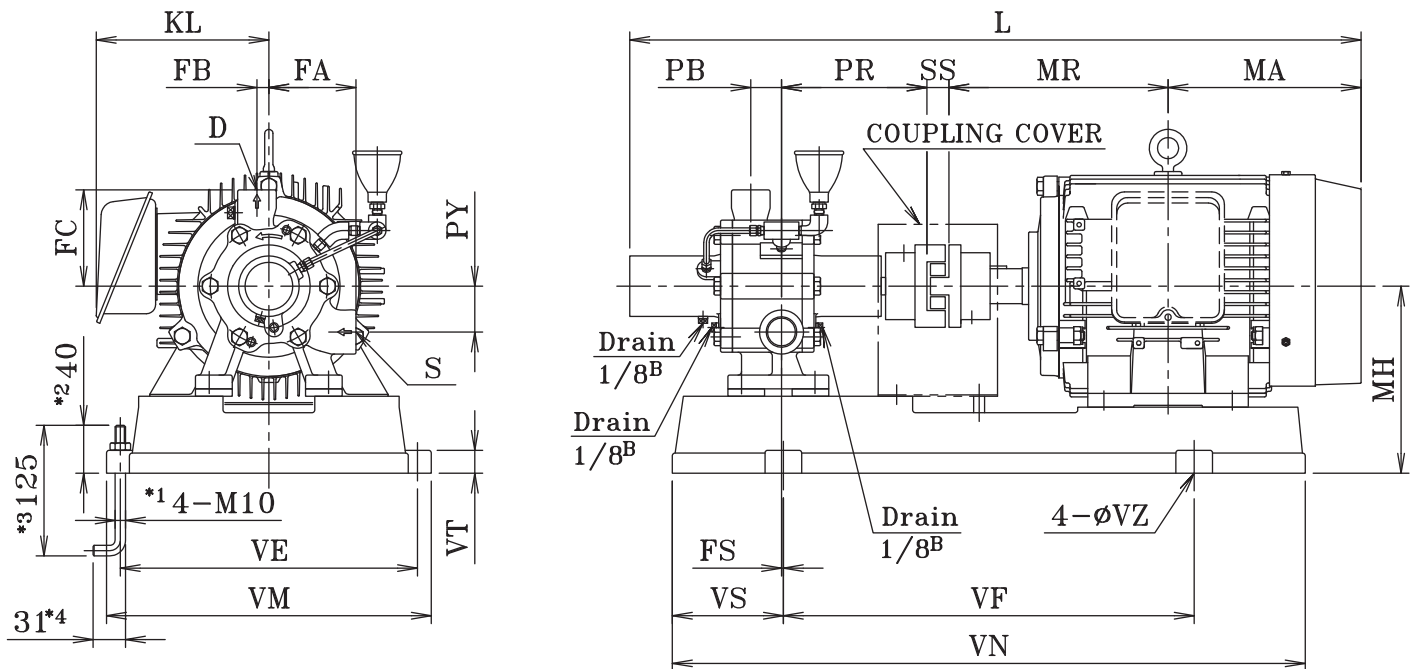

Dimension and Weights

(Unit:mm,kg)

Model	kW	S	D	PR	PY	FA	FB	FS	PB	FC	MH	L	MA	MR	SS	VE	VF	VM	VN	VS	VT	VZ	KL	Weight
25STW STWS	2.2	Rc1	Rc3/4	158.5	50	95	13	4	33.5	105	167	667	154.5	168.5	20	230	350	260	500	75	15	12	156	50.5
	3.7	Rc1	Rc3/4	158.5	50	95	13	2	33.5	105	177	730	186	200	20	280	425	310	609	92	25	12	175	64
	5.5	Rc1	Rc3/4	158.5	50	95	13	2	33.5	105	204	797.5	210.5	239	24	324	448	354	690	121	25	12	212	97
32STW STWS	3.7	Rc1 1/4	Rc1	158.5	55	105	15	2	31.5	110	185	730	186	200	20	280	425	310	609	92	25	12	175	69
	5.5	Rc1 1/4	Rc1	158.5	55	105	15	2	31.5	110	204	797.5	210.5	239	24	324	448	354	690	121	25	12	212	99
	7.5	Rc1 1/4	Rc1	158.5	55	105	15	2	31.5	110	204	797.5	210.5	239	24	324	448	354	690	121	25	12	212	104
	11	Rc1 1/4	Rc1	158.5	55	105	15	6	31.5	110	245	932.5	290	323	40	368	614	404	878	132	20	15	279.5	160
40STW STWS	5.5	Rc1 1/2	Rc1 1/4	160	60	110	15	3	27	120	204	797.5	210.5	239	24	324	448	354	690	121	25	12	212	99
	7.5	Rc1 1/2	Rc1 1/4	160	60	110	15	3	27	120	204	797.5	210.5	239	24	324	448	354	690	121	25	12	212	104
	11	Rc1 1/2	Rc1 1/4	160	60	110	15	8	27	120	245	977	290	323	40	368	614	404	878	132	20	15	279.5	160
50STW STWS	11	Rc2	Rc1 1/2	178	70	130	20	12	27	130	245	987	290	323	30	368	614	404	878	132	20	15	279.5	162
	15	Rc2	Rc1 1/2	178	70	130	20	12	27	130	245	987	290	323	30	368	614	404	878	132	20	15	279.5	176
	18.5	Rc2	Rc1 1/2	178	70	130	20	12	27	130	245	987	268	345	30	368	614	404	878	132	20	15	279.5	193

-Remarks-

- Dimensions and weights shown in above table reflected to Totally Enclosed Fan Cooled type motor. Values will be slightly different when other type of motor is being used.
- Size of the foundation bolts for 11 kW or greater sizes is M12 (*1), and dimensions for *2 is 40mm, *3 is 150mm and *4 is 38mm in that case.