


Totally enclosed fan-cooled (IE3)(*1)

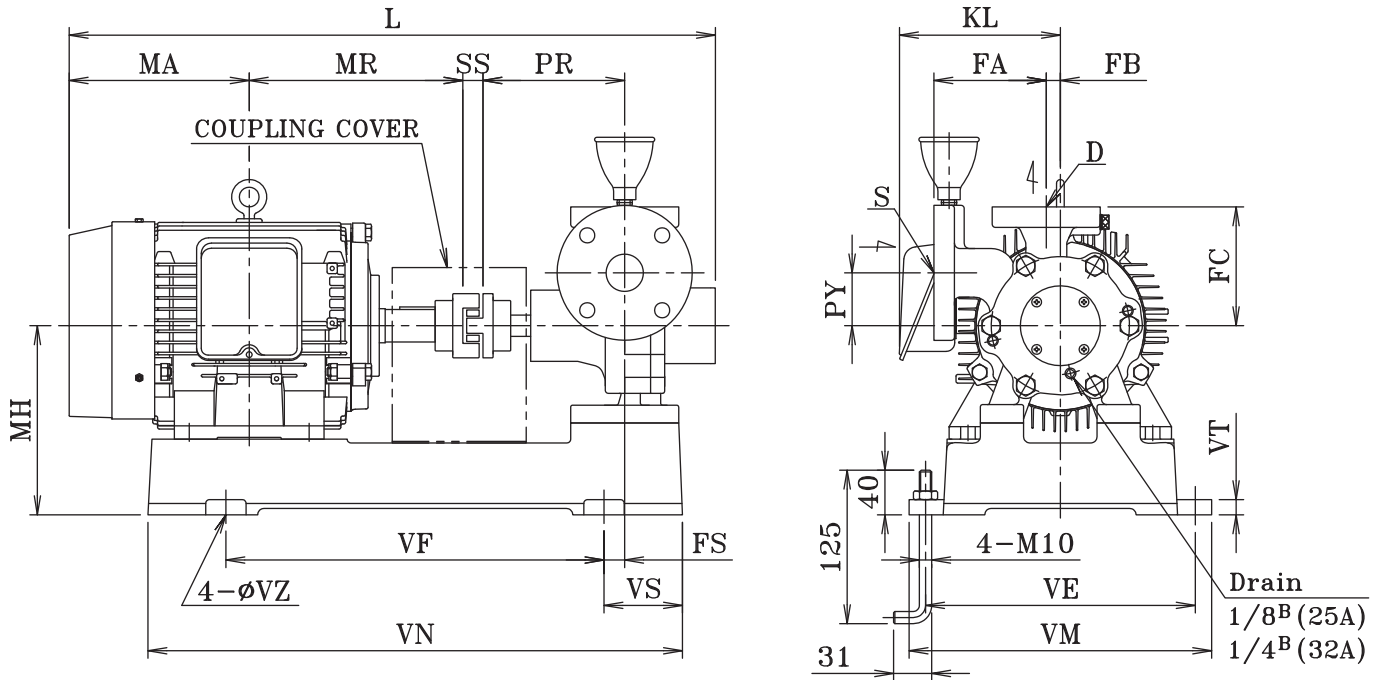

Dimension and Weights

(Unit:mm,kg)

Model	kW	S	D	PR	PY	FA	FB	FS	FC	MH	L	MA	MR	SS	VE	VF	VM	VN	VS	VT	VZ	KL	Weight	
																							ST	STS
25ST-1 STS	1.5	25A	20A	128	50	104	13	0	110	145	553	154.5	168.5	20	230	350	260	500	75	15	12	156	46	45
	2.2	25A	20A	128	50	104	13	0	110	145	553	154.5	168.5	20	230	350	260	500	75	15	12	156	49.5	49.5
25ST-2 STS	1.5	25A	20A	128	50	104	13	0	110	145	553	154.5	168.5	20	230	350	260	500	75	15	12	156	46	46
	2.2	25A	20A	128	50	104	13	0	110	145	553	154.5	168.5	20	230	350	260	500	75	15	12	156	49.5	49.5
	3.7	25A	20A	128	50	104	13	-30	110	180	616	186	200	20	280	425	310	616	95.5	25	12	175	66	66
32ST-1 STS	2.2	32A	25A	128	50	110	15	0	122	155	553	154.5	168.5	20	230	350	260	500	75	15	12	156	54.5	54.5
	3.7	32A	25A	128	50	110	15	20	122	177	616	186	200	20	280	425	310	609	92	25	12	175	69	69
	5.5	32A	25A	128	50	110	15	-15	122	204	689.5	210.5	239	30	324	448	354	690	121	25	12	212	101	102
32ST-2 STS	2.2	32A	25A	128	78	115	20	0	139	167	553	154.5	168.5	20	230	350	260	500	75	15	12	156	56.5	56.5
	3.7	32A	25A	128	78	115	20	20	139	177	616	186	200	20	280	425	310	609	92	25	12	175	69	69
	5.5	32A	25A	128	78	115	20	-15	139	204	689.5	210.5	239	30	324	448	354	690	121	25	12	212	101	101
32ST-3 STS	3.7	32A	25A	128	78	115	20	20	139	177	616	186	200	20	280	425	310	609	92	25	12	175	71	71
	5.5	32A	25A	128	78	115	20	-15	139	204	689.5	210.5	239	30	324	448	354	690	121	25	12	212	103	103

-Remarks-

- Dimensions and weights shown in above table reflected to Totally Enclosed Fan Cooled type motor. Values will be slightly different when other type of motor is being used.
- Suction flange is in accordance with JIS 10 K standard.
- Discharge flange is in accordance with JIS 20 K standard.