


Totally enclosed fan-cooled (IE3)(*1)

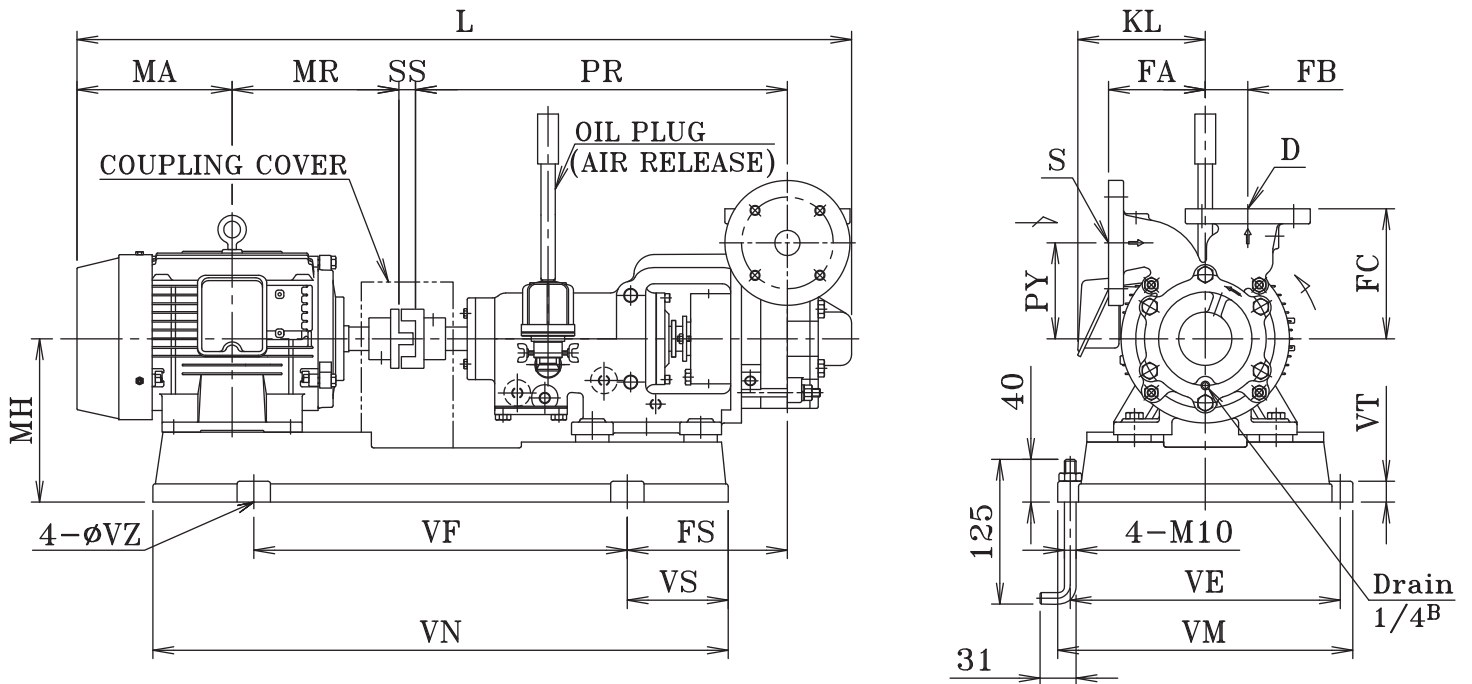

Dimension and Weights

(Unit:mm,kg)

Model	kW		S·D	PR	PY	FA	FB	FS	FC	MH	L	MA	MR	SS	VE	VF	VM	VN	VS	VT	VZ	KL	Weight	
	2P	4P																					2P	4P
25TN	-	0.4	25A	446	96	116	40	160	141	180	790	121	120	26	280	425	310	616	95.5	25	12	-	-	68
	-	0.75	25A	446	96	116	40	160	141	180	823	140	140	20	280	425	310	616	95.5	25	12	146	-	76.5
	1.5	-	25A	446	96	116	40	172	141	187	866	154.5	168.5	20	324	448	354	690	121	25	12	156	85	-
	2.2	-	25A	446	96	116	40	192	141	196	929	186	200	20	324	448	354	690	121	25	12	175	100	-
	3.7	-	25A	446	96	116	40	186	141	207	996.5	210.5	239	24	340	500	374	733	115	20	12	212	127	-
	5.5	-	25A	446	96	116	40	186	141	207	996.5	210.5	239	24	340	500	374	733	115	20	12	212	127	-
40TN	-	0.75	40A	446	115	116	51	160	156	180	823	140	140	20	280	425	310	616	95.5	25	12	146	-	80.5
	-	1.5	40A	446	115	116	51	172	156	187	866	154.5	168.5	20	324	448	354	690	121	25	12	156	-	91
	3.7	-	40A	446	115	116	51	192	156	196	929	186	200	20	324	448	354	690	121	25	12	175	113	-
	5.5	-	40A	446	115	116	51	186	156	207	996.5	210.5	239	24	340	500	374	733	115	20	12	212	131	-
	7.5	-	40A	446	115	116	51	186	156	207	996.5	210.5	239	24	340	500	374	733	115	20	12	212	135	-

-Remarks-

- Dimensions and weights shown in above table reflected to Totally Enclosed Fan Cooled type motor. Values will be slightly different when other type of motor is being used.
- Suction and discharge flanges are in accordance with JIS 20K FF standard.
- *1 Motor for 0.75 kW or greater sizes is complied with IE3 standard.