

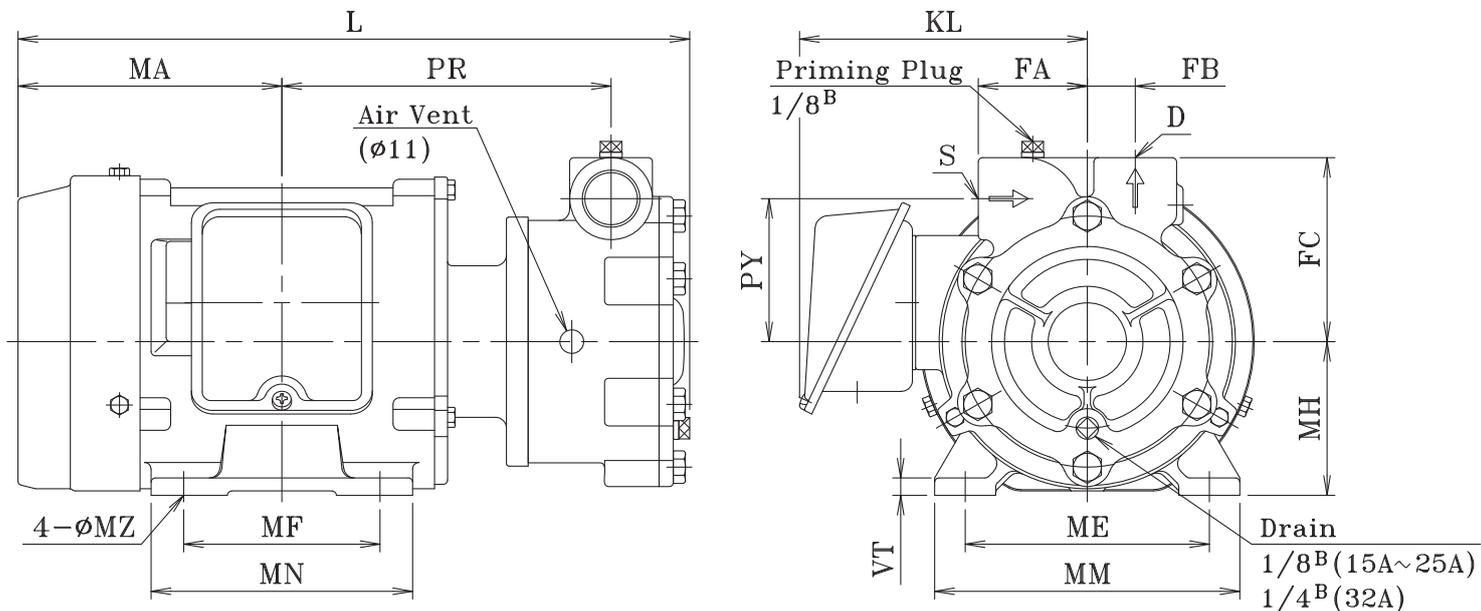


Totally enclosed fan-cooled (IE3)(*1)

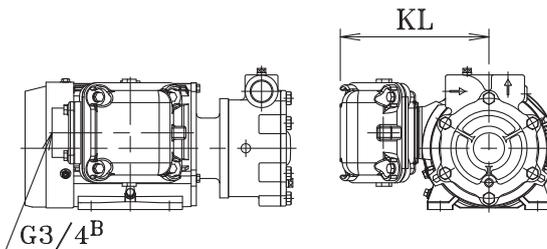

Single phase, open drip proof(*2)

Increased safety explosion proof(*3)

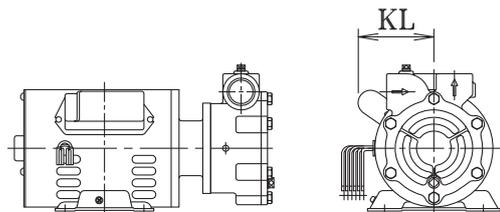

Dimension and Weights

(Unit:mm,kg)

	Model	kW	S·D	PR	PY	FA	FB	FC	MH	L	MA	ME	MF	MM	MN	MZ	VT	KL	Weight
TEFCM(*1)	15ULD04Z	0.4	Rc1/2	147	52	60	20	78	71	305	121	112	90	140	120	8×10	8	132	14
	20ULD04Z	0.4	Rc3/4	151	66	50	22	85	71	308	121	112	90	140	120	8×10	8	132	15
	20ULD07Z	0.75	Rc3/4	163	66	50	22	85	80	339	140	125	100	155	125	10×12	8	147	24
	25ULD04Z	0.4	Rc1	151.5	72	60	26	95	71	314	121	112	90	140	120	8×10	8	132	16
	25ULD07Z	0.75	Rc1	163.5	72	60	26	95	80	345	140	125	100	155	125	10×12	8	147	25
	25ULD15Z	1.5	Rc1	182	72	60	26	95	90	378	154.5	140	125	176	149	10×12	10	156	28
	32ULD07Z	0.75	Rc1 1/4	160	84	63	30	114	80	346	140	125	100	155	125	10×12	8	147	26
	32ULD15Z	1.5	Rc1 1/4	178.5	84	63	30	114	90	379	154.5	140	125	176	149	10×12	10	156	29
SPIM(*2)	15ULD02S	0.2	Rc1/2	152	52	60	20	78	71	286	97	112	90	150	110	7×20	3.2	86	14
	20ULD04S	0.4	Rc3/4	172.5	66	50	22	85	80	317.5	108.5	125	100	167	125	10×17	3.2	72	19
	25ULD04S	0.4	Rc1	173	72	60	26	95	80	323	108.5	125	100	167	125	10×17	3.2	72	20
ISM(*3)	15ULD04A	0.4	Rc1/2	147	52	60	20	78	71	305	121	112	90	140	120	7	8	171	21
	20ULD04A	0.4	Rc3/4	151	66	50	22	85	71	308	121	112	90	140	120	7	8	171	22
	20ULD07A	0.75	Rc3/4	163	66	50	22	85	80	339	140	125	100	155	125	10	8	181	31
	25ULD04A	0.4	Rc1	151.5	72	60	26	95	71	314	121	112	90	140	120	7	8	171	23
	25ULD07A	0.75	Rc1	163.5	72	60	26	95	80	345	140	125	100	155	125	10	8	181	32
	32ULD07A	0.75	Rc1 1/4	160	84	63	30	114	80	346	140	125	100	155	125	10	8	181	33

-Remarks-

Motor for 0.75kW or greater sizes is complied with IE3 standard.