
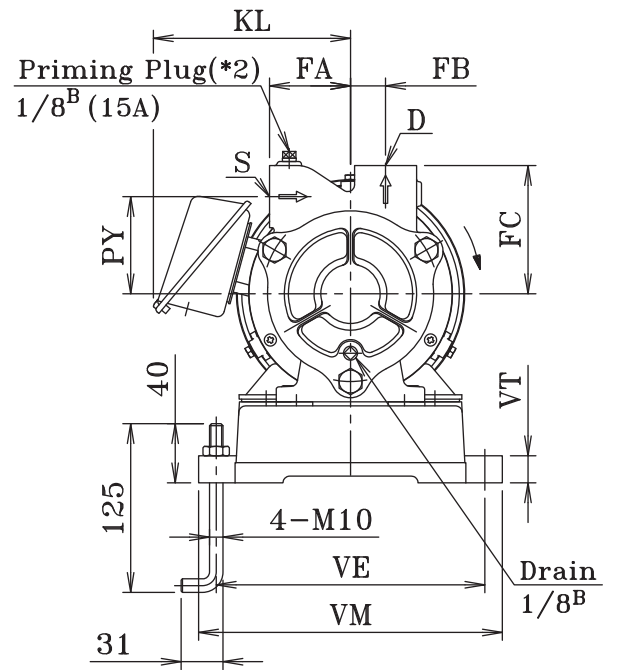


Totally enclosed fan-cooled (IE3)(\*1)

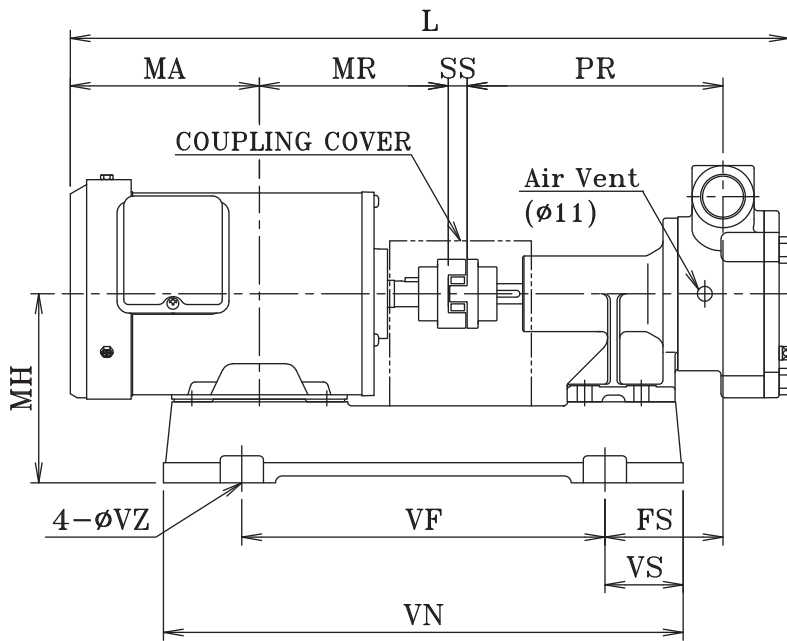

Dimension and Weights

(Unit:mm,kg)

Model	kW	S · D	PR	PY	FA	FB	FS	FC	MH	L	MA	MR	SS	VE	VF	VM	VN	VS	VT	VZ	KL	Weight
15UN	0.2	Rc1/2	190	52	60	20	89	78	115	453.5	109	103	14	170	220	196	335	57	12	12	-	16
20UN	0.2	Rc3/4	194	66	50	22	93	85	115	461	109	103	14	170	220	196	335	57	12	12	-	16
	0.4	Rc3/4	194	66	50	22	90	85	130	490	121	120	14	184	245	210	357	56	20	12	-	20
25UN	0.4	Rc1	189.5	72	60	26	85.5	95	130	493.5	121	120	14	184	245	210	357	56	20	12	-	22
	0.75	Rc1	189.5	72	60	26	87.5	95	140	532.5	140	140	14	199	269	225	385	58	20	12	146	32

-Remarks-

Dimensions and weights shown in above table reflected to Totally Enclosed Fan Cooled type motor. Values will be slightly different when other type of motor is being used.

\*1 Motor for 0.75kW or greater sizes is complied with IE3 standard.

\*2 Plug is not available for 20A & 25A models.