


# Totally enclosed fan-cooled (IE3)(\*1)

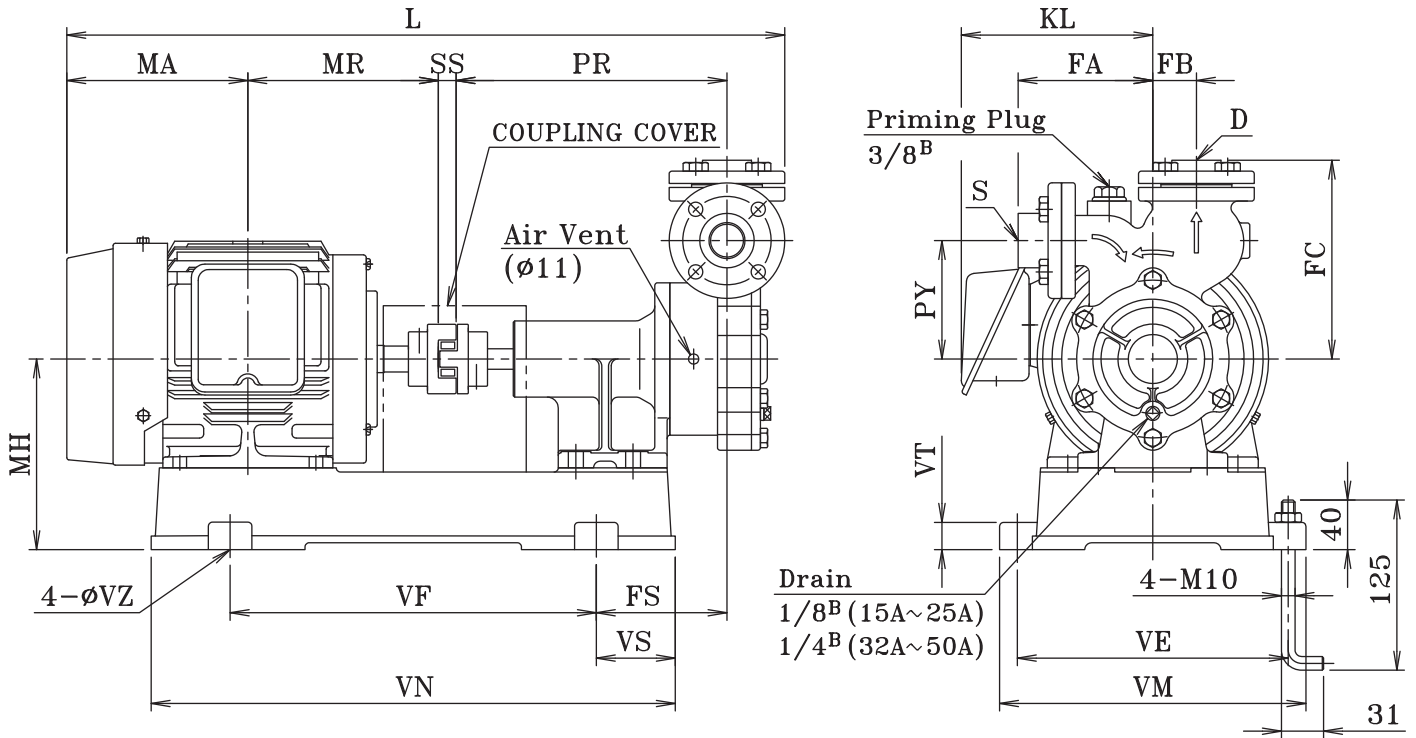

## Dimension and Weights

(Unit:mm,kg)

Model	kW	S·D	PR	PY	FA	FB	FS	FC	MH	L	MA	MR	SS	VE	VF	VM	VN	VS	VT	VZ	KL	Weight
15UP	0.2	15A	192	83	93	30	91	135	115	457	109	103	14	170	220	196	335	57	12	12	-	16
20UP	0.2	20A	198	87	99	32	97	146	115	466.5	109	103	14	170	220	196	335	57	12	12	-	21
	0.4	20A	198	87	99	32	94	146	130	495.5	121	120	14	184	245	210	357	56	20	12	-	25
	0.75	20A	198	87	99	32	96	146	140	534.5	140	140	14	199	269	225	385	58	20	12	146	35
25UP	0.4	25A	197	96	107	35	93	159	130	499.5	121	120	14	184	245	210	357	56	20	12	-	26
	0.75	25A	197	96	107	35	95	159	140	538.5	140	140	14	199	269	225	385	58	20	12	146	36
	1.5	25A	197	96	107	35	102	159	150	585.5	154.5	168.5	18	214	300	240	430	65	20	12	156	42
32UP	0.4	32A	194	105	117	38	90	175	130	506.5	121	120	14	184	245	210	357	56	20	12	-	28
	0.75	32A	194	105	117	38	92	175	140	545.5	140	140	14	199	269	225	385	58	20	12	146	38
	1.5	32A	194	105	117	38	99	175	150	592.5	154.5	168.5	18	214	300	240	430	65	20	12	156	44
40UP	0.75	40A	237	110	120	40	66	183	155	597	140	140	20	230	350	260	500	75	15	12	146	41
	1.5	40A	237	110	120	40	85	183	155	640	154.5	168.5	20	230	350	260	500	75	15	12	156	48
	2.2	40A	237	110	120	40	100	183	165	688	178	193	20	280	425	310	610	92.5	25	12	156	59
50UP	1.5	50A	235	118	128	43	83.5	196	155	643	154.5	168.5	20	230	350	260	500	75	15	12	156	50
	2.2	50A	235	118	128	43	98.5	196	165	691	178	193	20	280	425	310	610	92.5	25	12	156	61
	3.7	50A	235	118	128	43	98.5	196	177	706	186	200	20	280	425	310	610	92.5	25	12	175	72

### -Remarks-

Dimensions and weights shown in above table reflected to Totally Enclosed Fan Cooled type motor. Values will be slightly different when other type of motor is being used.

- Threaded counter flange in accordance with JIS 5K standard.

- Threaded counter flange with rhombus shape in accordance with Nikuni's standard for 15UP model.

\*1 Motor for 0.75kW or greater sizes is complied with IE3 standard.